

# ATEX CERTIFIED PRODUCTS

MP FILTRI KNOWS  
HOW TO MANAGE  
A POTENTIALLY  
EXPLOSIVE ATMOSPHERE




PASSION  PERFORM



### The concept

According to the regulation, each component used in potentially explosive atmospheres must ensure adequate ATEX protection, that is, it must present the precautions necessary to ensure it is removed at least one of the components of the triangle of fire.

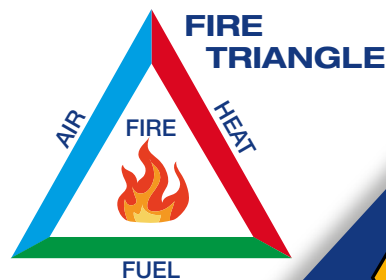

## THE ATEX CERTIFIED MP FILTRI PRODUCTS ARE THE FOLLOWING

Standard ATEX Directive 2014/34/EU and UK Regulation S.I. 2016 No. 1107 (as amended).

### HYDRAULIC FILTRATION

There are two different markings, defined by the type of gaskets that determine the maximum temperature.

#### FILTERS FOR POTENTIALLY EXPLOSIVE ATMOSPHERE

High pressure filters are designed to withstand the maximum pressure of the system and are sized according to the specific flow rate required. They offer exceptional protection to sensitive components downstream of the filters.



FMMX 050

FMMX 150

Filter with **NBR** seal in configuration **zerospark®**



II 3G Ex h IIC T6 Gc X  
II 3D Ex h IIIC T85°C Dc X  
T<sub>amb</sub> : -15°C ÷ +80°C, T<sub>max fluid</sub> +80°C

Filter with **EPDM / FPM / MFQ** seal in configuration **zerospark®**



II 3G Ex h IIC T6... T4 Gc X  
II 3D Ex h IIIC T85°C...T115°C Dc X  
T<sub>amb</sub> : -15°C ÷ +110°C, T<sub>max fluid</sub> +110°C

#### STAINLESS STEEL HIGH PRESSURE FILTERS

Stainless steel construction ensures peak protection when operating in corrosive environments or aggressive fluids. High pressure stainless steel filters are used to protect individual valves or the entire hydraulic circuit from contamination.



FZH 040

FZP 136

FZH 012

FZP 039

FZX 011

Filter with **NBR** seal in configuration **zerospark®**



II 3G Ex h IIC T6 Gc X  
II 3D Ex h IIIC T85°C Dc X  
T<sub>amb</sub> : -15°C ÷ +80°C, T<sub>max fluid</sub> +80°C

Filter with **EPDM / FPM / MFQ** seal in configuration **zerospark®**



II 3G Ex h IIC T6... T4 Gc X  
II 3D Ex h IIIC T85°C...T115°C Dc X  
T<sub>amb</sub> : -15°C ÷ +110°C, T<sub>max fluid</sub> +110°C

#### THE ANTI-STATIC FILTERS

**zerospark®**

Zerospark® is a specialised solution designed to solve the problem of electrostatic discharge inside hydraulic filters. Caused by the electrical charge build-up due to the passage of oil through the filters, this can result in damage to filter elements, oils and circuit components. It can even cause fire hazards in environments where flammable materials are present.

## POWER TRANSMISSION



### AKG COMPLETE HALF-COUPLING

AKG Half-couplings are available to use in hazardous area with the presence of gas and/or vapors or dust.



AKG SERIES



II 2G Ex h IIC T6...T4 Gb  
II 2D Ex h IIIC T85°C...T135°C Db

Installation zone: **zone 1 / 21**  
Gas group: **IIC**  
Dust group: **IIIC**  
Ambient temperature: **-30°C ÷ +120°C**

## CLOGGING INDICATORS

There are two different markings, defined by the type of gaskets that determine the maximum temperature.

### VEA & VEB - VACUUM INDICATORS

Vacuum indicators are used on the Suction line to check the efficiency of the filter element. They measure the pressure up-stream of the filter element. Standard items are produced with R 1/4" EN 10226 connection. Products available with R 1/8" EN 10226.



I M1 Ex ia I Ma



II 1GD Ex ia IIC TX Ga  
Ex ia IIIC TX °C Da



VEA



VEB

### BEA - BAROMETRIC INDICATORS

Pressure indicators are used on the Return line to check the efficiency of the filter element. They measure the pressure upstream of the filter element. Standard items are produced with R 1/8" EN 10226 connection.



I M1 Ex ia I Ma



II 1GD Ex ia IIC TX Ga  
Ex ia IIIC TX °C Da



BEA

### DEH & DEZ - DIFFERENTIAL INDICATORS

Differential indicators are used on the Pressure line to check the efficiency of the filter element. They measure the pressure upstream and downstream of the filter element (differential pressure). Standard items are produced with special connection G 1/2" size (DEH) and 3/4" UNF (DEZ).



DEH



DEZ



II 1 GD Ex ia IIC T6 Ga -60°C ≤ Ta ≤ 80°C  
Ex ia IIC T4 Ga -60°C ≤ Ta ≤ 125°C



II 2 GD Ex db IIC T6\* Gb  
Ex tb IIIC T85°C\* Db  
(T<sub>amb</sub> : = -60°C to +70°C)\* IP66/67

\* alternative T/Class and ambients  
T4, T135°C (T<sub>amb</sub> = -60°C to +120°C)

## CONTAMINATION MONITORING PRODUCTS

### AZ2 - CONTAMINATION MONITOR FOR ATEX ZONE 2 HAZARDOUS ENVIRONMENTS

Hazardous environment permanently mounted in-line contamination monitor. High-risk and explosive environments.



AZ2



3G Ex nR IIB T5 Gc IP66

# WORLDWIDE NETWORK

CANADA ♦ CHINA ♦ FRANCE ♦ GERMANY ♦ INDIA ♦ SINGAPORE  
UNITED ARAB EMIRATES ♦ UNITED KINGDOM ♦ USA



PASSION  PERFORM

in   



[mpfiltri.com](http://mpfiltri.com)

MP Filtri reserves the right to make modifications to the models and versions of the described products at any time for both technical and/or commercial reasons. For updated information please visit our website: [www.mpfiltri.com](http://www.mpfiltri.com). The colors and the pictures of the products are purely indicative. Any reproduction, partial or total, of this document is strictly forbidden. All rights are strictly reserved.

MF002000170  
EN - 2024.03