

# FMM series

Maximum working pressure up to 42 MPa (420 bar) - Flow rate up to 300 l/min




# TYPICAL FILTER SIZING Selection Software

## Step ①

Select "FILTER SIZING SOFTWARE" after login

OR



Select "FILTER SIZING" after login from a product page

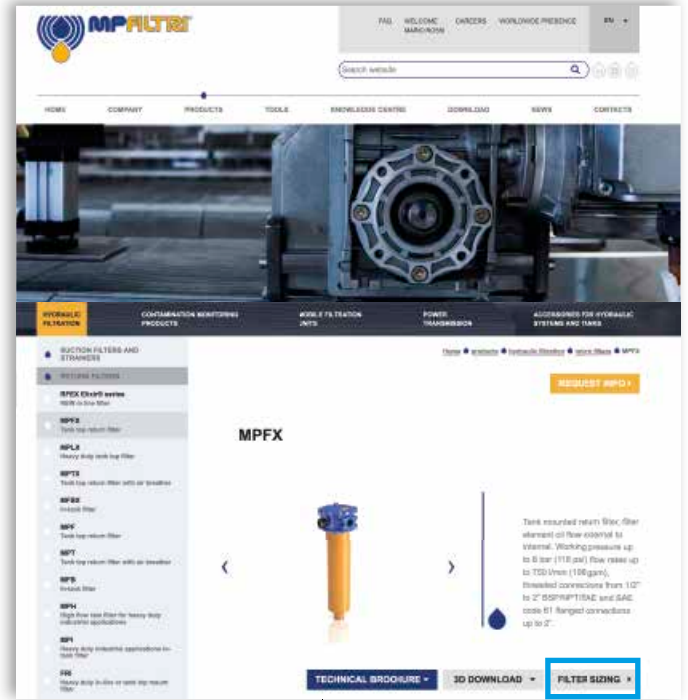

Choose the type of filter family.  
Enter the main data for sizing the filter  
then push CALCULATE.


## Step ②

Enter the main data for sizing the filter  
then push CALCULATE.

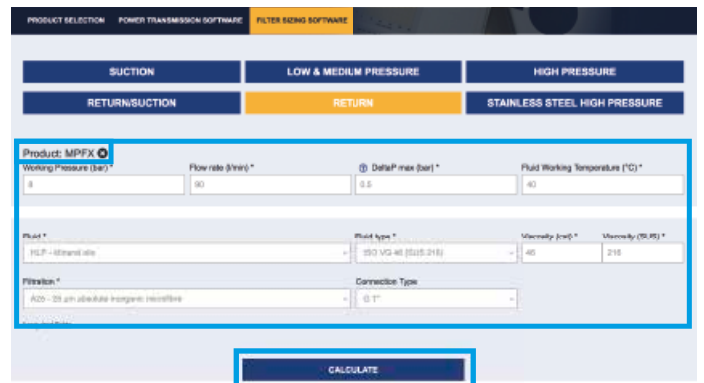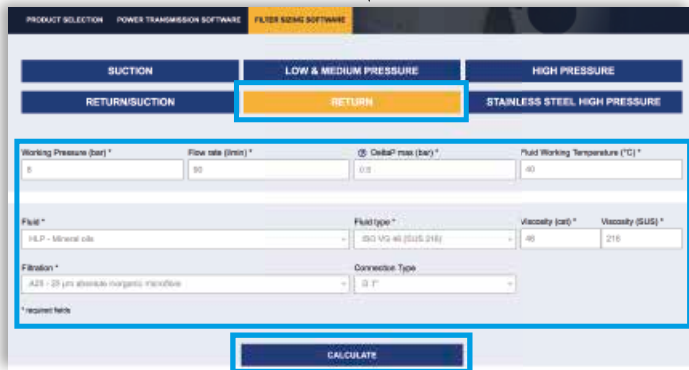

## Step ③

Select the desired options to choose the appropriate filter type for the application.

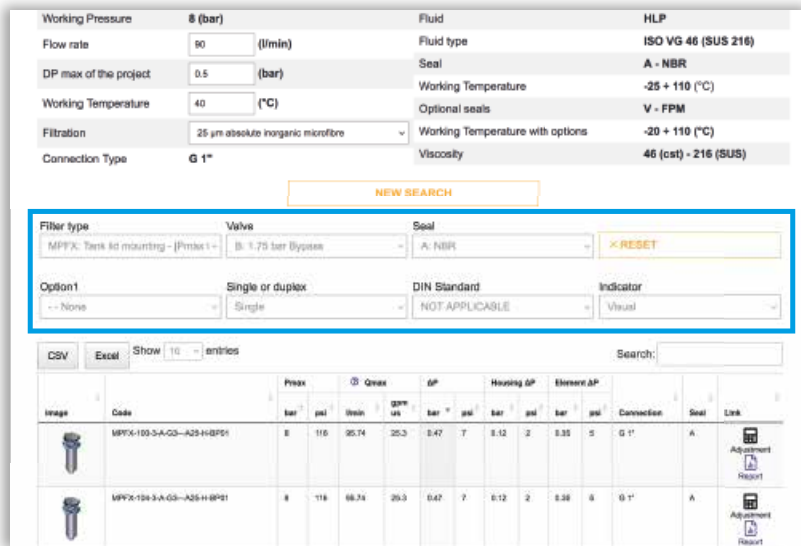


## Step 4

Choose the most suitable filter from the proposed list.

| Image | Code                       | Peak<br>bar | Qmax<br>psi | Qmax<br>m³/min | Qmax<br>gpm us | ΔP<br>bar | ψ | Housing ΔP<br>bar | ψ | Element ΔP<br>bar | ψ | Connection | Seal | Link |
|-------|----------------------------|-------------|-------------|----------------|----------------|-----------|---|-------------------|---|-------------------|---|------------|------|------|
|       | MPFX-103-3-A-Q3-A25-H-BPST | 8           | 116         | 25.74          | 25.3           | 0.47      | 7 | 0.12              | 2 | 0.33              | 5 | G 1"       | A    |      |
|       | MPFX-104-3-A-Q3-A25-H-BPST | 8           | 116         | 25.74          | 25.3           | 0.47      | 7 | 0.12              | 2 | 0.33              | 5 | G 1"       | A    |      |

## Step 5

It is possible to change the filter modifying every parameter.



### A SAVE YOUR FILTER'S REPORT



### B MANUAL EDIT



SAVE IN YOUR ARCHIVE  
typing your reference data and then SAVE AS PDF



A new browser window displays the pdf

see **A**

Close the report window



By clicking your WELCOME button, the SHOW REPORTS is displayed: select it to see your filters list.

## Description

## Technical data

### High Pressure filters

#### In-line

**Maximum working pressure up to 42 MPa (420 bar)**

**Flow rate up to 300 l/min**

FMM is a range of versatile high pressure filter for protection of sensitive components in high pressure hydraulic systems in the mobile machines.

They are directly connected to the lines of the system through the hydraulic fittings.

#### Available features:

- Female threaded connections up to 1 1/4", for a maximum flow rate of 250 l/min
- Fine filtration rating, to get a good cleanliness level into the system
- Bypass valve, to relieve excessive pressure drop across the filter media
- Low collapse filter element "N", for use with filters provided with bypass valve
- Low collapse filter element with external support "R", for filter element protection against the back pressure caused by the check valve in filters provided with the bypass valve
- High collapse filter element with external support "S", for filter element protection against the back pressure caused by the check valve in filters not provided with the bypass valve
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

- Agricultural machines
- Mobile machines

#### Filter housing materials

- Head: Painted cast iron, black RAL 9005
- Housing: Phosphatized steel
- Bypass valve: Steel

#### Pressure

- Test pressure: 63 MPa (630 bar)
- Burst pressure: 126 MPa (1260 bar)
- Pulse pressure fatigue test: 1 000 000 cycles with pressure from 0 to 42 MPa (420 bar)

#### Bypass valve

- Opening pressure 600 kPa (6 bar) ±10%
- Other opening pressures on request.

#### Δp element type

- Microfiber filter elements - series N-R: 20 bar
- Microfiber filter elements - series S: 210 bar
- Wire mesh filter elements - series N: 20 bar
- Fluid flow through the filter element from OUT to IN

#### Seals

- Standard NBR series A
- Optional FPM series V

#### Temperature

From -25 °C to +110 °C

#### Connections

In-line Inlet/Outlet

#### Note

FMM filters are provided for vertical mounting



## Weights [kg] and volumes [dm<sup>3</sup>]

| Filter series  | Weights [kg] |      |      |       |      | Volumes [dm <sup>3</sup> ] |        |      |      |      |      |      |
|----------------|--------------|------|------|-------|------|----------------------------|--------|------|------|------|------|------|
|                | Length       | 1    | 2    | 3     | 4    | 5                          | Length | 1    | 2    | 3    | 4    | 5    |
| <b>FMM 050</b> |              | 3.11 | 3.48 | 3.90  | 4.36 | 5.54                       |        | 0.34 | 0.48 | 0.63 | 0.81 | 1.23 |
| <b>FMM 150</b> |              | 7.50 | 9.50 | 10.90 | -    | -                          |        | 0.60 | 1.00 | 1.25 | -    | -    |

| Filter series  | Length   | Filter element design - N Series |     |     |     |     |     | Filter element design - S Series |     |     |     |     |
|----------------|----------|----------------------------------|-----|-----|-----|-----|-----|----------------------------------|-----|-----|-----|-----|
|                |          | A03                              | A06 | A10 | A16 | A25 | M25 | A03                              | A06 | A10 | A16 | A25 |
| <b>FMM 050</b> | <b>1</b> | 42                               | 43  | 79  | 82  | 106 | 147 | 29                               | 39  | 57  | 59  | 74  |
|                | <b>2</b> | 52                               | 57  | 85  | 96  | 121 | 149 | 45                               | 49  | 76  | 88  | 114 |
|                | <b>3</b> | 66                               | 69  | 97  | 106 | 130 | 150 | 58                               | 61  | 89  | 99  | 125 |
|                | <b>4</b> | 83                               | 89  | 113 | 115 | 134 | 152 | 74                               | 80  | 106 | 108 | 129 |
|                | <b>5</b> | 107                              | 110 | 130 | 134 | 141 | 154 | 93                               | 95  | 111 | 121 | 139 |
| <b>FMM 150</b> | <b>1</b> | 81                               | 88  | 156 | 163 | 179 | 295 |                                  |     |     |     |     |
|                | <b>2</b> | 142                              | 145 | 227 | 230 | 236 | 312 |                                  |     |     |     |     |
|                | <b>3</b> | 170                              | 180 | 242 | 245 | 263 | 315 |                                  |     |     |     |     |

### Maximum flow rate for a complete pressure filter with a pressure drop $\Delta p = 1.5$ bar.





The reference fluid has a kinematic viscosity of 30 mm<sup>2</sup>/s (cSt) and a density of 0.86 kg/dm<sup>3</sup>.

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).





You can also calculate the right size using the formulas present on the FILTER SIZING paragraph at the beginning of the full catalogue or at the beginning of the filter family brochure. Please, contact our Sales Department for further additional information.

### Hydraulic symbols


| Filter series  | Style S | Style B | Style T | Style D |
|----------------|---------|---------|---------|---------|
| <b>FMM 050</b> | •       | •       | •       | •       |
| <b>FMM 150</b> | •       | •       | •       | •       |

Pressure drop  
Filter housings  
 $\Delta p$  pressure drop

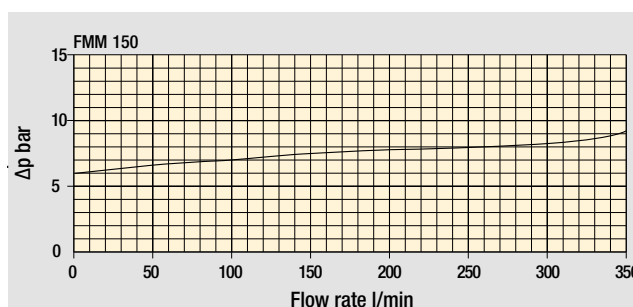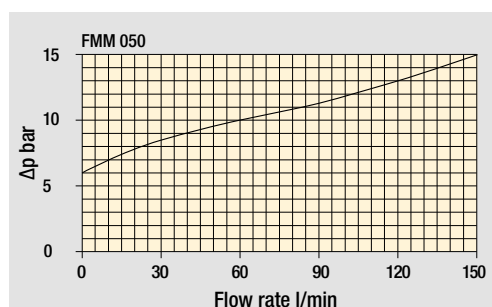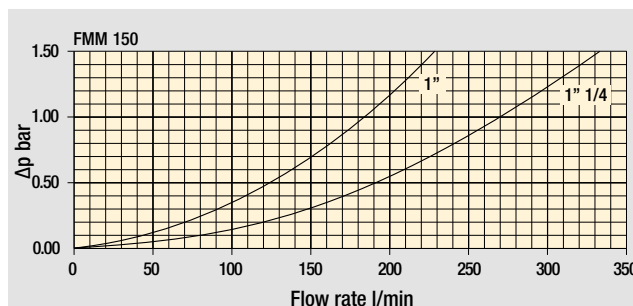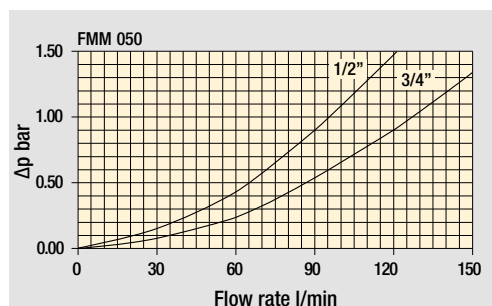

Bypass valve  
pressure drop

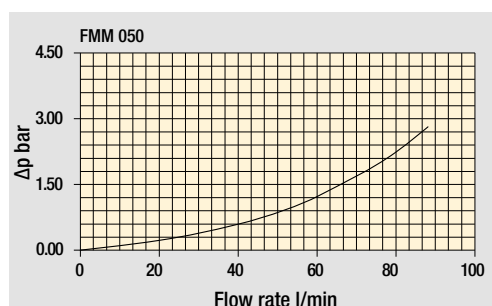

Filter housing  
with check valve

Valves

The curves are plotted using mineral oil with density of 0.86 kg/dm<sup>3</sup> in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

## Designation & Ordering code

### COMPLETE FILTER

Series and size **FMM050** Configuration example: **FMM050** **3** **B** **A** **G** **A10** **N** **P01**

#### Length

1 | 2 | 3 | 4 | 5

#### Valves

- S** Without bypass
- B** With bypass 6 bar
- T** With check valve, without bypass
- D** With check valve, with bypass 6 bar

#### Seals

- A** NBR
- V** FPM

#### Connections

- A** M18x1.5 - ISO 6149
- B** M22x1.5 - ISO 6149
- C** G 1/2"
- D** G 3/4"
- E** 1/2" NPT
- F** 3/4" NPT
- G** SAE 8 - 3/4" - 16 UNF
- H** SAE 12 - 1 1/16" - 12 UN

#### Filtration rating (filter media)

- A03** Inorganic microfiber 3 µm
- A06** Inorganic microfiber 6 µm
- A10** Inorganic microfiber 10 µm
- A16** Inorganic microfiber 16 µm
- A25** Inorganic microfiber 25 µm
- M25** Wire mesh 25 µm

| Element Δp       | Valves |   |   |   |  |
|------------------|--------|---|---|---|--|
|                  | S      | B | T | D |  |
| <b>N</b> 20 bar  |        | • |   |   |  |
| <b>R</b> 20 bar  |        |   |   | • |  |
| <b>S</b> 210 bar | •      |   | • |   |  |

#### Execution

- P01** Upper connection for clogging indicator
- P02** Without connection for clogging indicator
- P03** Frontal connection for clogging indicator
- Pxx** Customized

### FILTER ELEMENT

Element series and size **HP050** Configuration example: **HP050** **3** **A10** **A** **N** **P01**

#### Element length

1 | 2 | 3 | 4 | 5

#### Filtration rating (filter media)

- A03** Inorganic microfiber 3 µm
- A06** Inorganic microfiber 6 µm
- A10** Inorganic microfiber 10 µm
- A16** Inorganic microfiber 16 µm
- A25** Inorganic microfiber 25 µm
- M25** Wire mesh 25 µm

#### Seals

- A** NBR
- V** FPM

#### Element Δp

- N** 20 bar
- R** 20 bar
- S** 210 bar

#### Execution


- P01** MP Filtri standard
- Pxx** Customized

### ACCESSORIES

| Differential indicators                                     | page    |   | page |
|---|---------|---|------|
| <b>DEA</b> Electrical differential indicator                | 577     | <b>DLE</b> Electrical / visual differential indicator | 580  |
| <b>DEH</b> Hazardous area electronic differential indicator | 577-578 | <b>DTA</b> Electronic differential indicator          | 581  |
| <b>DEM</b> Electrical differential indicator                | 578-579 | <b>DVA</b> Visual differential indicator              | 581  |
| <b>DLA</b> Electrical / visual differential indicator       | 579-580 | <b>DVM</b> Visual differential indicator              | 581  |

#### Additional features


- T2** Plug 582

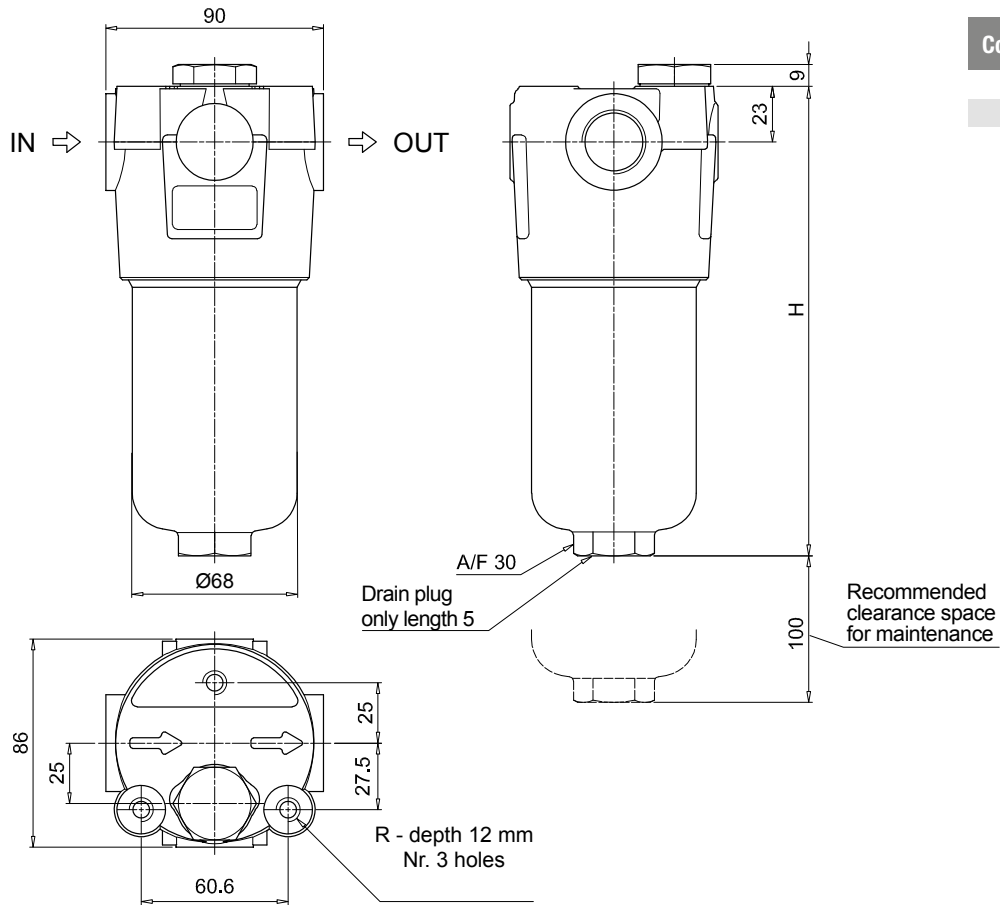

| FMM050        |        |
|---------------|--------|
| Filter length | H [mm] |
| 1             | 158    |
| 2             | 195    |
| 3             | 237    |
| 4             | 285    |
| 5             | 407    |

| Connections | R        |
|-------------|----------|
| A-B-C-D     | M10      |
| E-F-G-H     | 3/8" UNC |

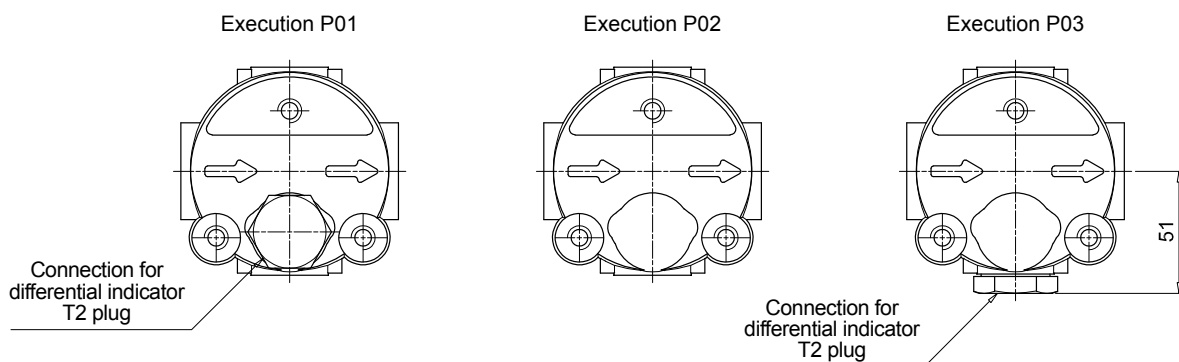

## Designation & Ordering code

### COMPLETE FILTER

|  |   |  |  |  |  |  |  |  |  |  |                                      |                                       |                                      |                                       |                                       |                            |
|--|---|--|--|--|--|--|--|--|--|--|--------------------------------------|---------------------------------------|--------------------------------------|---------------------------------------|---------------------------------------|----------------------------|
| <b>Series and size</b>                       | Configuration example: <b>FMM150</b>   <b>2</b>   <b>B</b>   <b>A</b>   <b>D</b>   <b>2</b>   <b>M25</b>   <b>N</b>   <b>P01</b>  |  |  |  |  |  |  |  |  |  |                                      |                                       |                                      |                                       |                                       |                            |
| <b>FMM150</b>                                |   |  |  |  |  |  |  |  |  |  |                                      |                                       |                                      |                                       |                                       |                            |
| <b>Length</b>                                | 1   2   3   |  |  |  |  |  |  |  |  |  |                                      |                                       |                                      |                                       |                                       |                            |
| <b>Valves</b>                                | S Without bypass<br>B With bypass 6 bar   |  |  |  |  |  |  |  |  |  |                                      |                                       |                                      |                                       |                                       |                            |
| <b>Seals</b>                                 | A NBR<br>V FPM  |  |  |  |  |  |  |  |  |  |                                      |                                       |                                      |                                       |                                       |                            |
| <b>Connections</b>                           | C G 1"<br>D G 1 1/4"<br>E 1" NPT<br>F 1 1/4" NPT<br>G SAE 16 - 1 5/16" - 12 UN<br>H SAE 20 - 1 5/8" - 12 UN   |  |  |  |  |  |  |  |  |  |                                      |                                       |                                      |                                       |                                       |                            |
| <b>Connection for differential indicator</b> | 1 Without connection<br>2 Upper connection<br>3 Frontal connection  |  |  |  |  |  |  |  |  |  |                                      |                                       |                                      |                                       |                                       |                            |
| <b>Filtration rating (filter media)</b>      | <table border="0"> <tr> <td><b>A03</b> Inorganic microfiber 3 µm</td> <td><b>A16</b> Inorganic microfiber 16 µm</td> </tr> <tr> <td><b>A06</b> Inorganic microfiber 6 µm</td> <td><b>A25</b> Inorganic microfiber 25 µm</td> </tr> <tr> <td><b>A10</b> Inorganic microfiber 10 µm</td> <td><b>M25</b> Wire mesh 25 µm</td> </tr> </table> |  |  |  |  |  |  |  |  |  | <b>A03</b> Inorganic microfiber 3 µm | <b>A16</b> Inorganic microfiber 16 µm | <b>A06</b> Inorganic microfiber 6 µm | <b>A25</b> Inorganic microfiber 25 µm | <b>A10</b> Inorganic microfiber 10 µm | <b>M25</b> Wire mesh 25 µm |
| <b>A03</b> Inorganic microfiber 3 µm         | <b>A16</b> Inorganic microfiber 16 µm   |  |  |  |  |  |  |  |  |  |                                      |                                       |                                      |                                       |                                       |                            |
| <b>A06</b> Inorganic microfiber 6 µm         | <b>A25</b> Inorganic microfiber 25 µm   |  |  |  |  |  |  |  |  |  |                                      |                                       |                                      |                                       |                                       |                            |
| <b>A10</b> Inorganic microfiber 10 µm        | <b>M25</b> Wire mesh 25 µm  |  |  |  |  |  |  |  |  |  |                                      |                                       |                                      |                                       |                                       |                            |
|  | <b>Element Δp</b>   |  |  |  |  | <b>Execution</b>                         |  |  |  |  |                                      |                                       |                                      |                                       |                                       |                            |
|  | N 20 bar  |  |  |  |  | P01 MP Filtri standard<br>Pxx Customized |  |  |  |  |                                      |                                       |                                      |                                       |                                       |                            |




### FILTER ELEMENT

|   |   |  |                   |  |  |  |  |                                      |                                       |                                      |                                       |                                       |                            |
|---|---|--|-------------------|--|--|--|--|--------------------------------------|---------------------------------------|--------------------------------------|---------------------------------------|---------------------------------------|----------------------------|
| <b>Element series and size</b>          | Configuration example: <b>HP150</b>   <b>2</b>   <b>M25</b>   <b>A</b>   <b>N</b>   <b>P01</b>  |  |                   |  |  |  |  |                                      |                                       |                                      |                                       |                                       |                            |
| <b>HP150</b>                            |   |  |                   |  |  |  |  |                                      |                                       |                                      |                                       |                                       |                            |
| <b>Element length</b>                   | 1   2   3   |  |                   |  |  |  |  |                                      |                                       |                                      |                                       |                                       |                            |
| <b>Filtration rating (filter media)</b> | <table border="0"> <tr> <td><b>A03</b> Inorganic microfiber 3 µm</td> <td><b>A16</b> Inorganic microfiber 16 µm</td> </tr> <tr> <td><b>A06</b> Inorganic microfiber 6 µm</td> <td><b>A25</b> Inorganic microfiber 25 µm</td> </tr> <tr> <td><b>A10</b> Inorganic microfiber 10 µm</td> <td><b>M25</b> Wire mesh 25 µm</td> </tr> </table> |  |                   |  |  |  |  | <b>A03</b> Inorganic microfiber 3 µm | <b>A16</b> Inorganic microfiber 16 µm | <b>A06</b> Inorganic microfiber 6 µm | <b>A25</b> Inorganic microfiber 25 µm | <b>A10</b> Inorganic microfiber 10 µm | <b>M25</b> Wire mesh 25 µm |
| <b>A03</b> Inorganic microfiber 3 µm    | <b>A16</b> Inorganic microfiber 16 µm   |  |                   |  |  |  |  |                                      |                                       |                                      |                                       |                                       |                            |
| <b>A06</b> Inorganic microfiber 6 µm    | <b>A25</b> Inorganic microfiber 25 µm   |  |                   |  |  |  |  |                                      |                                       |                                      |                                       |                                       |                            |
| <b>A10</b> Inorganic microfiber 10 µm   | <b>M25</b> Wire mesh 25 µm  |  |                   |  |  |  |  |                                      |                                       |                                      |                                       |                                       |                            |
|   | <b>Seals</b>  |  | <b>Element Δp</b> |  | <b>Execution</b>                         |  |  |                                      |                                       |                                      |                                       |                                       |                            |
|   | A NBR<br>V FPM  |  | N 20 bar          |  | P01 MP Filtri standard<br>Pxx Customized |  |  |                                      |                                       |                                      |                                       |                                       |                            |




### ACCESSORIES

| Differential indicators                                     | page    |   | page |
|---|---------|---|------|
| <b>DEA</b> Electrical differential indicator                | 577     | <b>DLE</b> Electrical / visual differential indicator | 580  |
| <b>DEH</b> Hazardous area electronic differential indicator | 577-578 | <b>DTA</b> Electronic differential indicator          | 581  |
| <b>DEM</b> Electrical differential indicator                | 578-579 | <b>DVA</b> Visual differential indicator              | 581  |
| <b>DLA</b> Electrical / visual differential indicator       | 579-580 | <b>DVM</b> Visual differential indicator              | 581  |
| <b>Additional features</b>                                  | page    |   |      |
| <b>T2</b> Plug  | 582     |   |      |



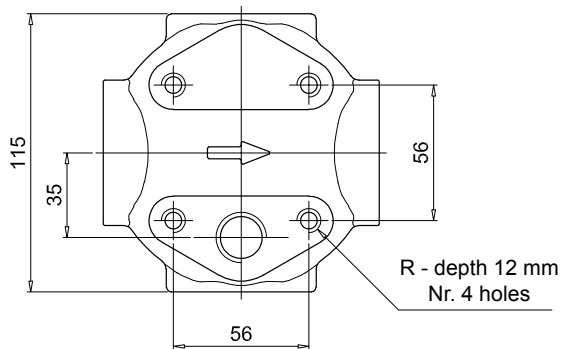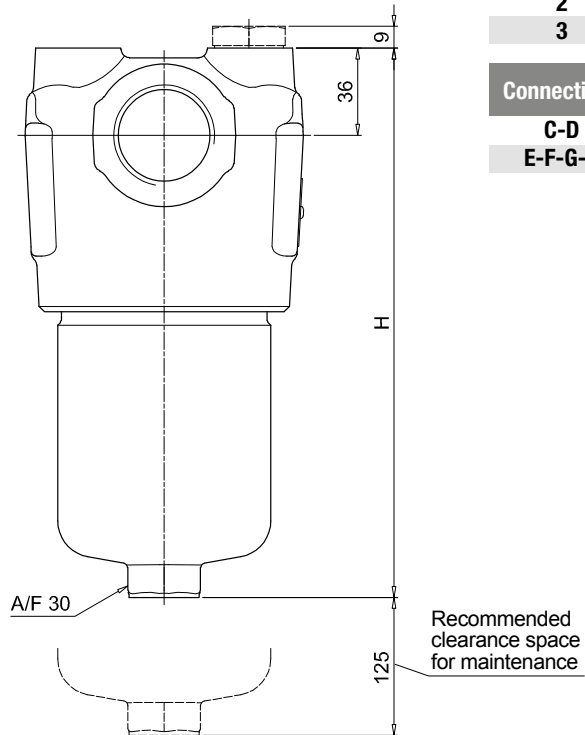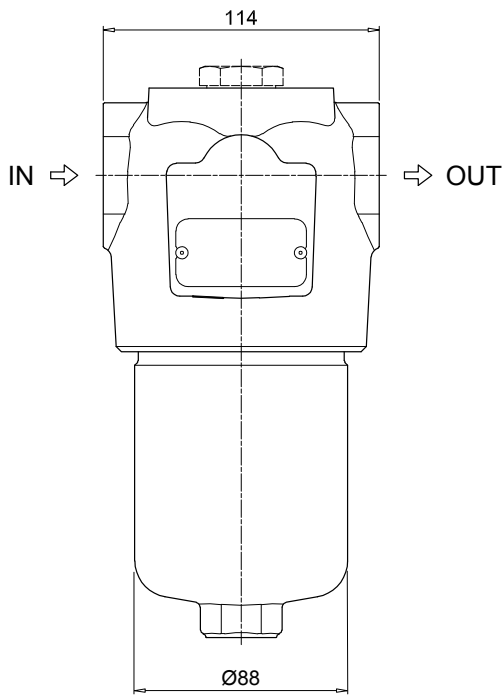


| FMM150        |          |
|---------------|----------|
| Filter length | H [mm]   |
| 1             | 230      |
| 2             | 340      |
| 3             | 415      |
| Connections   | R        |
| C-D           | M10      |
| E-F-G-H       | 3/8" UNC |

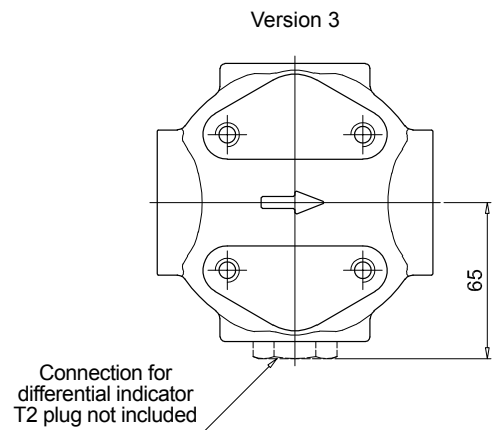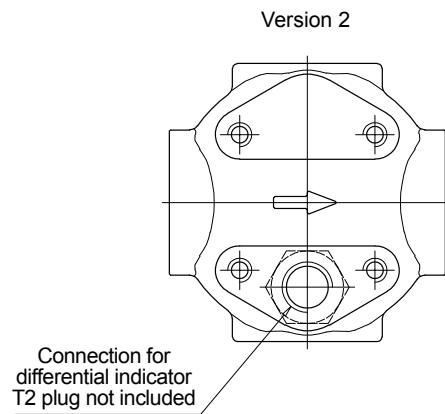

# FMM SPARE PARTS


Order number for spare parts

## FMM 050

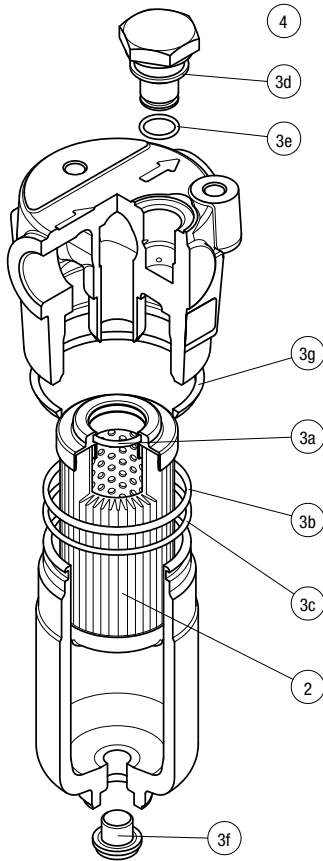

| Item:          | Q.ty: 1 pc.<br>2 | Q.ty: 1 pc.<br>3 (3a ÷ 3g) | Q.ty: 1 pc.<br>4 |                           |     |
|----------------|------------------|----------------------------|------------------|---------------------------|-----|
| Filter series  | Filter element   | Seal Kit code number       |                  | Indicator connection plug |     |
|                |                  | NBR                        | FPM              | NBR                       | FPM |
| <b>FMM 050</b> | See order table  | 02050314                   | 02050315         | T2H                       | T2V |

## FMM 150

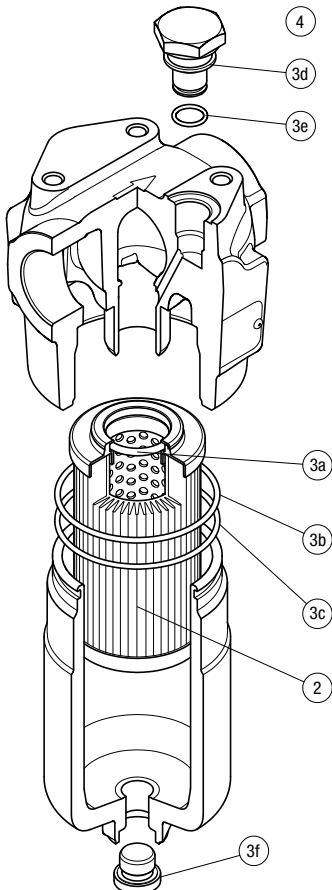

| Item:          | Q.ty: 1 pc.<br>2 | Q.ty: 1 pc.<br>3 (3a ÷ 3f) | Q.ty: 1 pc.<br>4 |                           |     |
|----------------|------------------|----------------------------|------------------|---------------------------|-----|
| Filter series  | Filter element   | Seal Kit code number       |                  | Indicator connection plug |     |
|                |                  | NBR                        | FPM              | NBR                       | FPM |
| <b>FMM 150</b> | See order table  | 02050731                   | 02050732         | T2H                       | T2V |